



SPFG 自润滑翻边轴套
SPFG Metric Flange Bushing

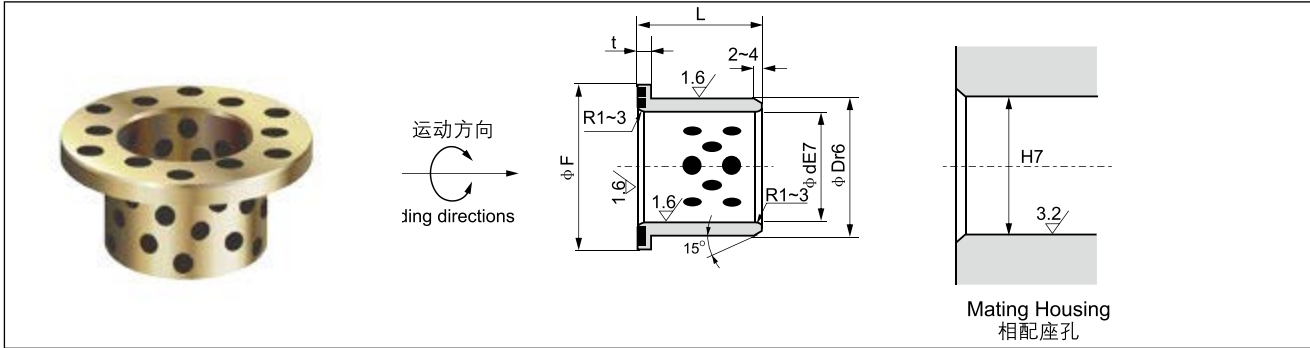

内径 E7 I.D. ϕd		外径 r6 O.D. ϕD		翻边 Flange		长度 L ^{-0.1} _{-0.3}									
				ϕF	t	10	11	12	13	15	18	20	23	25	
6	+0.032 +0.020	10	+0.028 +0.019	20	3	0610	0611	0612							
8	+0.040 +0.025	12	+0.034 +0.023	25				0812	0813	0815					
10		14							1013		1018				
12	+0.050 +0.032	18	+0.041 +0.028	30			1211				1218		1223		
13		19						1313		1318		1323			
15		21				35			1513		1518		1523		
16		22				40			1613		1618		1623	1625	
18		24		45		5						1818		1823	
20	+0.061 +0.040	28	+0.050 +0.034	50									2020		2025
25		33											2520		2525
30		38										3020		3025	
35	+0.075 +0.050	44	+0.060 +0.041	65								3520		3525	
40		50			70		7								
50	+0.090 +0.060	62	+0.062 +0.043	90	8										
60		74				110									
70		85		+0.073 +0.051	120	10									
80		96			140										

SPFG 自润滑翻边轴套 SPFG Metric Flange Bushing

Material	650 # + Graphite
材质	高力黄铜 + 石墨

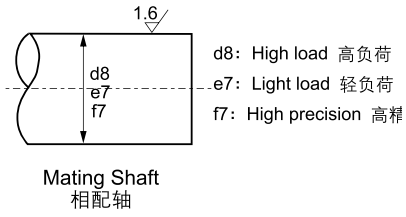

单位 (Unit): mm

长度 L ^{-0.1} _{0.3}												压装后内孔	内径
27	35	37	38	47	48	50	58	60	68	80	90	I.D. After Press-Fitting	I.D. Ø d
												+0.016 +0.004	6
												+0.021 +0.006	8
												+0.031 +0.013	10
												+0.026 +0.008	12
													13
													15
													16
												+0.037 +0.016	18
												+0.032 +0.011	20
												+0.046 +0.021	25
													30
												+0.040 +0.015	35
													40
												+0.053 +0.023	4027
													5038
												+0.046 +0.016	5048
													6038
												+0.046 +0.016	6048
													6058
												+0.046 +0.016	6068
													7075
												+0.046 +0.016	7080
													8060
												+0.046 +0.016	8090
													7080
												+0.046 +0.016	8060
													8090